

cod. 15 10 60 10 09

**ICE**

Stazione ricarica aria  
condizionata automatica  
SENZA STAMPANTE

*Automatic air  
conditioning recharger  
WITHOUT PRINTER*

cod. 15 10 60 10 10

**ICE PRINTER**

Stazione ricarica aria  
condizionata automatica  
CON STAMPANTE

*Automatic air  
conditioning recharger  
WITH PRINTER*

**Caratteristiche tecniche:**

- > Pompa a vuoto da 70 lt/1<sup>1</sup>
- > Serbatoio da 12,5 kg
- > Display alfanumerico
- > Software in 17 lingue
- > Manometri alta/bassa pressione  
ø 80 mm. classe 1 con scala Ok-NotOk
- > Software "lavaggio automatico"
- > Compressore 400 gr / 1<sup>1</sup>
- > Tubi mt. 2 a norma SAEJ2196
- > Dimensioni mm. 500 x 520 x 950
- > Peso 65 kg.

- Technical features:*
- > 70 lt/1<sup>1</sup> vacuum pump
  - > 12,5 kg tank with automatic heater
  - > Alphanumeric display
  - > Software in 17 languages
  - > High/low pressure gauges  
ø 80 mm class 1 with Ok-Not Ok scale
  - > Automatic flushing software
  - > 400 gr / 1<sup>1</sup> compressor
  - > Hoses mt. 2 according to SAEJ2196
  - > Dimensions mm. 500 x 520 x 950
  - > Weight 65 kg.

**FUNZIONI :** > recupero automatico; > scarico olio automatico; > vuoto programmabile automatico; > test del vuoto automatico; > iniezione olio automatica; > carica automatica; > data e ora; > password utente; > statistiche consumi gas refrigerante (recuperato e caricato); > possibilità di variazione viscosità olio (con barra grafica); > compensazione automatica lunghezza tubi di servizio; > nuova tastiera (tipo joystick) per una selezione più rapida dei menù e per l'intestazione dati dell'officina (modelli printer); > pulizia interna impianto stazione a/c multipass (max. 20 minuti)

**FUNCTIONS:** > recovery automatic; > oil discharge automatic; > programmable vacuum automatic; > vacuum test automatic; > oil injection automatic; > charge automatic; > date - time; > user password (max 10 users); > refrigerant consumption statistics (recovered and charged); > possibility to adjust the oil viscosity (with graphic bar); > automatic compensation of the operation hoses; > new keyboard (joystick-like) for a quicker selection of the menu and the heading of the workshop information (printer models); > a/c station internal system cleaning multipass (max 20 minutes)

ACCESSORI PER STAZIONE ARIA CONDIZIONATA

ACCESSORIES FOR AIR CONDITIONING STATION

cod. 15 10 63 00 10

Kit con lampada UV  
Set with UV lamp



cod. 15 10 63 00 15

Kit turafalle monouso  
Kit sealing leaks in air conditioning system



cod. 15 10 63 00 14

Kit manutenzione impianti aria condizionata  
Kit for maintenance of air conditioning system




cod. 15 10 63 00 13

Trattamento igienizzante completo per autoveicoli 2x50 cc.  
Bottle antibatteric spray 2x50 cc.



cod. 15 10 63 00 17

Kit o-ring in viton  
Set viton o-ring

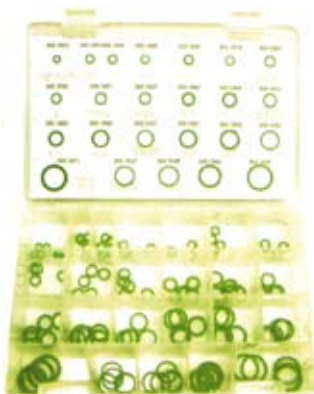

cod. 15 10 63 00 12

Trattamento igienizzante 200 cc.  
Hygienizing treatment 200 cc.



cod. 15 10 63 00 19

Termometro digitale tascabile doppia portata: -40/+300° F; -40/+150°C, richiamo di temperatura MIN e MAX, risoluzione 0,1°C

Pocket size digital thermometer, dual temp range -40/+150°C, 40/+300°F, min max temperature memory



cod. 15 10 63 00 11

Tanica olio per R134  
Oil tank for R134

